

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : F21V 8/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/32982 (43) International Publication Date: 8 June 2000 (08.06.00)</p>
<p>(21) International Application Number: PCT/US99/28435 (22) International Filing Date: 30 November 1999 (30.11.99) (30) Priority Data: 09/203,213 30 November 1998 (30.11.98) US (71) Applicant: GENERAL ELECTRIC COMPANY [US/US]; 1 River Road, Schenectady, NY 12345 (US). (72) Inventors: LEVINSON; Lionel, Monty; 1 Linda Lane, Niskayuna, NY 12309 (US). SRIVASTAVA, Alok, Mani; 2A4 Sheridan Village, Schenectady, NY 12308 (US). DUCLOS, Steven, Jude; 61 Carriage Road, Clifton Park, NY 12065 (US). DUGGAL, Anil, Raj; 2322 Algonquin Road, Niskayuna, NY 12309 (US). (74) Agents: STECKLER, Henry, I. et al.; General Electric Com- pany, 3135 Easton Turnpike W3C, Fairfield, CT 06431 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>
<p>(54) Title: DECORATIVE LIGHTING APPARATUS WITH LIGHT SOURCE AND LUMINESCENT MATERIAL</p> <div data-bbox="316 1165 1209 1396"></div> <p>(57) Abstract</p> <p>An exemplary lighting apparatus (100) comprises a light source (110) such as an LED, a transmissive body (130) optically coupled to the light source (110), and at least one region of luminescent material (140) formed on a portion of the transmissive body (130), the at least one region of luminescent material (140) forming an ornamental design on the transmissive body (130), wherein the at least one region of luminescent material (140) absorbs light having a first spectrum transmitted through the transmissive body (130) and emits light having a second spectrum outside of the transmissive body (130). The lighting apparatus (100) can be used in a decorative manner, such as for holiday lighting or as a display. The lighting apparatus (100) can be used to display a variety of patterns and shapes and can operate safely a low power over a long lifetime.</p>		



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification: F21V 8/00	A1	(11) International Publication Number: WO 00/32982 (43) International Publication Date: 08 June 2000 (08.06.2000)
(21) International Application Number: PCT/US99/28435 (22) International Filing Date: 30 November 1999 (30.11.1999) (30) Priority Data: 09/203,213 30 November 1998 (30.11.1998) US (60) Parent Application or Grant GENERAL ELECTRIC COMPANY [/]; O. LEVINSON, Lionel, Monty [/]; O. SRIVASTAVA, Alok, Mani [/]; O. DUCLOS, Steven, Jude [/]; O. DUGGAL, Anil, Raj [/]; O. STECKLER, Henry, I.; O.		Published
(54) Title: DECORATIVE LIGHTING APPARATUS WITH LIGHT SOURCE AND LUMINESCENT MATERIAL (54) Titre: APPAREIL D'ECLAIRAGE DECORATIF COMPORTANT UNE SOURCE LUMINEUSE ET UNE MATIERE LUMINESCENTE		
(57) Abstract <p>An exemplary lighting apparatus (100) comprises a light source (110) such as an LED, a transmissive body (130) optically coupled to the light source (110), and at least one region of luminescent material (140) formed on a portion of the transmissive body (130), the at least one region of luminescent material (140) forming an ornamental design on the transmissive body (130), wherein the at least one region of luminescent material (140) absorbs light having a first spectrum transmitted through the transmissive body (130) and emits light having a second spectrum outside of the transmissive body (130). The lighting apparatus (100) can be used in a decorative manner, such as for holiday lighting or as a display. The lighting apparatus (100) can be used to display a variety of patterns and shapes and can operate safely a low power over a long lifetime.</p> (57) Abrégé <p>L'invention concerne un modèle d'appareil d'éclairage (100) qui comprend une source lumineuse (110), telle qu'une diode électroluminescente, un corps transmissif (130) couplé par voie optique à la source lumineuse (110), et au moins une zone faite d'une matière luminescente (140) située sur une partie du corps transmissif (130). Cette zone de matière luminescente (140) forme un dessin décoratif sur le corps transmissif (130). La zone de matière luminescente (140) absorbe la lumière ayant un premier spectre et transmet à travers ledit corps (130), puis émet une lumière ayant un second spectre hors dudit corps (130). L'appareil d'éclairage (100) peut être utilisé à des fins décoratives, tel qu'un éclairage festif ou un affichage. Cet appareil (100) peut en outre être utilisé pour afficher divers motifs et formes, et fonctionne sans danger à basse puissance pendant une longue durée.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Description

5

10

15

20

25

30

35

40

45

50

55

5
10
15
20
25
30
35
40
45
50
55

DECORATIVE LIGHTING APPARATUS WITH
LIGHT SOURCE AND LUMINESCENT MATERIAL

BACKGROUND

Field of the Invention

5 The present invention relates generally to decorative lighting, and more particularly to a lighting apparatus which includes a light source and a luminescent material which absorbs light from the light source and emits light of a different color.

Description of the Related Art

10 Examples of decorative lighting are numerous. U.S. Patent No. 5,649,755, for example, discloses an elongated, decorative, flexible, light-transmitting assembly, useful for adorning wearing apparel, which includes a source of light having a light-transmitting area. A length of clear flexible polymer has a first end adjacent the light transmitting area and an elongated body having an outer surface and a remote end. The length has many marks formed inwardly from the outer surface to cause the light entering the first end to be reflected in an attractive manner.

15 Another example of decorative lighting is disclosed in U.S. Patent No. 5,752,337. This patent discloses a multi-color illuminated panel made up of a decorative frontsheet having windows cut therein, a transparent supporting sheet, which may also have decorative printing thereon, and a pre-wired backsheet on which are affixed discrete individual single-color electro-luminescent light panel segments. The electro-luminescent light segments may have different colors and are arranged to shine through the windows and provide a multi-color lighting effect.

5 U.S. Patent No. 5,639,157 discloses a decorative string lighting system which
includes a plurality of illuminators, a power cord for connection to a source of
electrical power, and a wire harness for feeding the power to the illuminators.
10 The system can also include a multiplicity of light output transducers, a
5 control circuit powered from an external source for activating the transducers,
the transducers of an illuminator subset being in separate circuit paths for
independent activation by the control circuit, a translucent illuminator body, a
15 fiber-optic element, one end of the element being optically connected to the
illuminator body, and a coupler member optically connected to an opposite
20 end of the fiber optic element, the coupler member being formed for receiving
light from the illuminator subset and transmitting the light into the fiber optic
element for lighting the illuminator body, means for producing spectrally
distinct light from each transducer of the illuminator subset, whereby the
25 illuminator body is lighted in colors corresponding to activated ones of the
transducers of the coupler subset.

Although the above examples of decorative lighting are satisfactory, it
would be desirable to have a decorative lighting apparatus which was simple
30 in design, and which provided enhanced flexibility in emitting light of desired
colors at selected locations in desired patterns.

20 SUMMARY

35 An exemplary lighting apparatus comprises a light source, a
transmissive body optically coupled to the light source, and at least one region
40 of luminescent material formed on a portion of the transmissive body, the at
least one region of luminescent material forming an ornamental design on the
25 transmissive body, wherein the at least one region of luminescent material
absorbs light having a first spectrum transmitted through the transmissive
45 body and emits light having a second spectrum outside of the transmissive
body. The lighting apparatus can be used in a decorative manner, such as for

5 holiday lighting or as a display. The lighting apparatus can be used to display
a variety of patterns and shapes and can operate safely at a low power over a
long lifetime.

BRIEF DESCRIPTION OF THE DRAWINGS

15 5 Other features and advantages of the invention will be apparent from the
following detailed description and the accompanying drawings, in which:

Figure 1 illustrates a lighting apparatus having a light source and a
transmissive body according to one embodiment of the invention;

Figure 2 illustrates a cross section of the transmissive body of Figure 1;

10 25 Figure 3 illustrates a lighting apparatus having a light source and a plurality of
transmissive bodies according to another embodiment of the invention; and

Figure 4 illustrates a lighting apparatus having a plurality of light sources and
a transmissive body in the form of a thin strip according to another
embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

35 Figure 1 illustrates a lighting apparatus according to one embodiment
of the invention. The lighting apparatus 100 includes a light source 110
powered via electrical connectors 112, an optical coupler 120, a transmissive
40 20 body 130, and at least one region of luminescent material 140.

The light source 110 typically comprises a light emitting diode (LED) or a laser
45 diode. For example, the light source may comprise an LED or a laser diode
which emits ultraviolet (UV) or blue light. Such LEDs and laser diodes are
available commercially from Nichia Industrial Chemicals Ltd. in Japan.

5 Examples of LEDs which emit blue or UV radiation are described in U. S. Patent Nos. 5,813,752 and 5,813,753. Examples of laser diodes which emit blue or UV radiation are described in U.S. Patent Nos. 5,604,763 and 10 5,644,584. See also Shuji Nakamura and Gerhard Fasol, "The Blue Laser Diode" (1997). 5

15 The light source 110 can be optically coupled to the transmissive body 130 by an optical coupler 120. The optical coupler 120 may be in the shape of a truncated cone such that substantially all the radiation emitted from the light source 110 is coupled into the transmissive body 130. The optical coupler 120 10 and the transmissive body are preferably transparent in the wavelengths emitted by the light source 110. Typically, the optical coupler 120 and the transmissive body 130 are formed of a flexible material such as a polymer (e.g. epoxy or thermoplastic), a silicone, or a glass. For example, a polymer material having a thickness on the order of 1 mm may be flexible enough to 20 bend with a radius of curvature of 1 mm or less without damage to the material. The optical coupler and transmissive body can be formed integrally as a single piece, in which case the optical coupler is merely the end portion of the transmissive body. 25

30 The lighting apparatus 100 is typically configured such that substantially all the light from the light source 110 is transmitted through the transmissive body 130 by total internal reflection. The transmissive body 130 can be a fiber optic cable, for example, through which the light from the light source propagates by total internal reflection. 35

40 Formed on the transmissive body 130 is at least one, and typically a plurality of regions of luminescent material 140. Typically, the luminescent material 25 comprises an inorganic phosphor, as will be described below. However, other types of luminescent materials such as organic luminescent materials and dyes can be used in conjunction with exemplary embodiments of the invention. 45

In operation, the light source 110 generates light of a certain spectrum which is coupled to the transmissive body 130 through the optical coupler 120. The light propagates through the transmissive body until it is incident on one of the phosphor regions 140. The phosphor region 140 absorbs some fraction of the light from the light source which has a first spectrum and emits light of a different spectrum which is directed outside of the transmissive body 130 to produce a decorative effect.

The phosphor regions are typically decorative or ornamental in nature. The phosphor regions can be formed in any desired shape, pattern, or ornamental design. For example, as shown in Figure 1, the phosphor regions may comprise a plurality of discrete circular regions which are distributed along the length of the fiber optic cable. The phosphor regions may also comprise other shapes or patterns such as diamonds, helixes, ellipses, letters, numbers, or any other pattern or design, whether simple or elaborate. Typically, the phosphor regions cover only a portion of the surface of the transmissive body, rather than the entire surface of the transmissive body.

The phosphor regions may have different compositions to produce different colors when irradiated by radiation from the light source. For example, the following phosphors can be used with a UV light source:

<u>Phosphor</u>	<u>Emitting Color</u>
$(\text{Sr}, \text{Ba}, \text{Ca})_5(\text{PO}_4)_3\text{Cl}:\text{Eu}^{2+}$	blue
$\text{BaMg}_2\text{Al}_{16}\text{O}_{27}:\text{Eu}^{2+}$	blue
$\text{BaMgAl}_{10}\text{O}_{17}:\text{Eu}^{2+}$	blue
$\text{Ca}_8\text{Mg}(\text{SiO}_4)_4\text{Cl}_2:\text{Eu}^{2+}, \text{Mn}^{2+}$	green

5	$\text{Ba}_2\text{SiO}_4:\text{Eu}^{2+}$	green
	$\text{Ba}_2(\text{Mg},\text{Zn})\text{Si}_2\text{O}_7:\text{Eu}^{2+}$	green
10	$(\text{Ba},\text{Sr})\text{Al}_2\text{O}_4:\text{Eu}^{2+}$	green
	$\text{Y}_2\text{O}_3:\text{Bi}^{3+},\text{Eu}^{3+}$	red

15

The following phosphors can be used with a blue light source:

20

5

25	<u>Phosphor</u>	<u>Emitting Color</u>
	$\text{Y}_3\text{Al}_5\text{O}_{12}:\text{Ce}^{3+}$	yellow
30	$\text{Ba}_2\text{MgSi}_2\text{O}_7:\text{Eu}^{2+}$	yellow
	$\text{Ba}_2\text{SiO}_4:\text{Eu}^{2+}$	yellow
	$\text{SrS}:\text{Eu}^{2+}$	red
35	$\text{SrY}_2\text{S}_4:\text{Eu}^{2+}$	red
	$\text{CaLa}_2\text{S}_4:\text{Ce}^{3+}$	red
40	$(\text{Ca},\text{Sr})\text{S}$	red
	$(\text{Sr},\text{Ca},\text{Ba})(\text{Al},\text{Ga})_2\text{S}_4:\text{Eu}^{2+}$	green

45

6

50

55

5 Combinations of the above phosphors can be used to produce white light. For example, with a blue light source, $Y_3Al_5O_{12}:Ce^{3+}$ can be combined with one of $SrS:Eu^{2+}$; $SrY_2S_4:Eu^{2+}$; and $CaLa_2S_4:Ce^{3+}$ to produce white light. (Ca,Sr)S can be combined with $(Sr,Ca,Ba)(Al,Ga)_2S_4:Eu^{2+}$ to produce white light. With a UV light source, a combination of the listed red, green, and blue phosphors can be used to produce white light. Other colors can be produced with appropriate combinations of phosphors, as will be recognized by those skilled in the art.

10 The phosphor regions can be formed in a number of ways. According to one embodiment, the phosphor regions are deposited directly onto portions of the surface of the transmissive body. The light propagating through the transmissive body which is incident on the phosphor regions is converted in wavelength and directed out of the transmissive body. Directly depositing the phosphor regions on the surface of the transmissive body provides the advantage of ease of manufacturing.

15 According to other embodiments, the phosphor regions are formed on indentations on the transmissive body. For example, Figure 2 shows a cross section of the transmissive body 130 of Figure 1 which includes three indentations upon which three phosphor regions 140 are formed. The indentations can be spherical in shape, for example, or can have flat surfaces like a notch. The phosphor regions can also be formed on a roughened surface which acts to scatter light propagating down the transmissive body 130.

20 Typically, the indentation, notch, or roughened surface upon which the phosphor is deposited projects into the transmissive body. For example, as shown in Figure 2, the indentations project into the fiber optic cable. In this way, the indentations provide a larger surface upon which light propagating through the transmissive body is incident. These embodiments may provide the advantage that more light propagating through the transmissive body is absorbed by the phosphor regions, making them appear brighter.

5 According to another embodiment of the invention, the phosphor regions can
be formed around a sharp bend, e.g. 90-135°, in the fiber optic cable or
transmissive body. The bend in the transmissive body scatters the light
10 propagating therethrough onto the phosphor region formed on the bend
5 which converts the light to a different color.

15 According to other embodiments, a splice region is formed in the transmissive
body to scatter light. For example, two pieces of fiber optic cable can be
spliced together such that the splice region scatters light propagating
therethrough. A phosphor region is applied to the surface of the transmissive
10 body around the splice region to absorb the light scattered by the splice region
and to convert the light to a different spectrum and transmit the light outside
20 of the transmissive body. The phosphor region can also be sandwiched in the
splice region between the two pieces of fiber optic cable.

25 To prevent light from escaping from the transmissive body, a reflective
15 or blocking coating can be applied to the outer surface of the transmissive
body between the phosphor regions. The coating may comprise, for example,
a reflective metal such as aluminum or silver applied by evaporation, or a
30 reflective multilayer dielectric film such as $\text{SiO}_2/\text{TiO}_2$. The coating may itself
be covered on the outside by a paint of an appropriate color, e.g. green for
20 holiday decorations. The coating and paint layer can protect the transmissive
body from physical damage, enhance the contrast between the phosphor
35 regions and non-phosphor regions by eliminating scattered light between
phosphor regions, and prevent UV light from escaping from the transmissive
body.

40 25 Figure 3 illustrates a lighting apparatus according to another embodiment of
the invention. The lighting apparatus 300 includes a light source 310, a
plurality of transmissive bodies 330, and a plurality of phosphor regions 340.
45 The light source 310 may be an LED or a laser diode, for example. The
transmissive bodies 330 may comprise fiber optic cables which transmit the
30 light by total internal reflection. The phosphor regions 340 may be arranged

5 in any desired pattern and function to convert the radiation emitted from the
light source 310 into visible light. The transmissive body 330 may be coated
with a reflective coating and outer paint layer, as described above, to prevent
10 light from escaping from the transmissive body between the phosphor regions.

5 Figure 4 illustrates a decorative lighting apparatus according to another
embodiment of the invention. The lighting apparatus 400 includes a plurality
of light sources 410, 412, 414, a transmissive body 430, and a plurality of
15 phosphor regions 440. The light sources 410, 412, 414 may comprise, for
example, LEDs which emit light at different wavelengths, e.g. UV, blue, green,
red. The light sources 410, 412, 414 may also emit the same wavelength. For
10 example, three UV LEDs can be used so that the radiation emitted by the
LEDs is invisible while the radiation emitted by the phosphor regions is
visible.

25 The transmissive body 430 may be in the form of a thin sheet (e.g. having a
15 thickness between 10^{-3} cm and 1 cm) as shown in Figure 4, or in any other
shape. The phosphor regions 440 may be formed in any desired shape or
pattern, such as the letters depicted in Figure 4, or other letters, numbers,
30 pictures, patterns, and designs. Different phosphor regions, e.g. different
words or letters in Figure 4, can comprise different phosphors such that they
20 are caused to luminesce by only certain ones of the LEDs, and not by the other
LEDs. For example, the first word "EAT" may comprise one or more
phosphors which are activated only by the first LED 310, while the second
35 word "AT" comprises one or more phosphors which are activated only by the
second LED 312, etc. Illumination of the various phosphor regions can thus
40 25 be controlled to occur at preselected times and in various combinations by
activating the corresponding LEDs. As shown in Figure 4, a controller 450
can be utilized to activate the LEDs according to a desired schedule. The
45 transmissive body 430 may also be coated with a reflective coating and outer
paint layer, as described above, to prevent light from escaping from the
30 transmissive body between the phosphor regions.

5 Other embodiments of the invention will be apparent to those skilled in the art
from a consideration of the embodiments disclosed herein. For example, laser
10 diodes and other light sources can be used in addition to LEDs. The
transmissive body can be formed of various polymer or glass materials. A
5 variety of patterns, shapes, sizes, and powers can be implemented as desired.
The lighting apparatus can be sewn into clothing or used as jewelry or other
adornments. In addition to providing a great variety of applications,
15 exemplary embodiments of the invention can operate safely at a low power
(e.g. less than one watt) over a long lifetime (e.g. tens of thousands of hours).
10 It is intended that the specification and examples be considered as exemplary
only, with the scope and spirit of the invention being defined by the following
20 claims.

Claims

5

10

15

20

25

30

35

40

45

50

55

5 WHAT IS CLAIMED IS:

1. A lighting apparatus comprising

10 a light source;

a transmissive body optically coupled to the light source; and

15 5 at least one region of luminescent material formed on a portion of the transmissive body, the at least one region of luminescent material forming an ornamental design on the transmissive body, wherein the at least one region of luminescent material absorbs light having a first spectrum transmitted
20 through the transmissive body and emits light having a second spectrum
10 outside of the transmissive body.

25 2. The lighting apparatus of claim 1, wherein the at least one region of luminescent material comprises a phosphor.

30 3. The lighting apparatus of claim 1, wherein the at least one region of luminescent material is formed on an outside surface of the transmissive body.

35 4. The lighting apparatus of claim 1, further comprising a coating on a second
40 20 portion of the transmissive body not occupied by the at least one region of luminescent material, which coating prevents light from escaping from the transmissive body.

5 5. The lighting apparatus of claim 4, wherein the coating comprises a reflective metal.

10 6. The lighting apparatus of claim 4, wherein the coating comprises a
5 reflective multilayer dielectric film.

15 7. The lighting apparatus of claim 1, wherein the transmissive body includes
at least one indentation upon which the at least one region of luminescent
20 material is deposited.

10 8. The lighting apparatus of claim 1, wherein the transmissive body includes
at least one roughened surface upon which the at least one region of
25 luminescent material is deposited.

30 9. The lighting apparatus of claim 1, wherein the transmissive body comprises
15 a fiber optic cable.

35 10. The lighting apparatus of claim 9, wherein the at least one region of
luminescent material comprises a plurality of discrete regions of luminescent
40 20 material which are distributed along the surface of the fiber optic cable.

45 11. The lighting apparatus of claim 9, wherein the fiber optic cable includes a
splice region which scatters light outside of the transmissive body.

5 12. The lighting apparatus of claim 11, wherein the at least one region of luminescent material is sandwiched between two pieces of fiber optic cable in the splice region.

10
5 13. The lighting apparatus of claim 11, wherein the at least one region of luminescent material is formed on an outside surface of the fiber optic cable around the splice region.

20
10 14. The lighting apparatus of claim 1, wherein the transmissive body is in the form of a thin sheet, and the at least one region of luminescent material comprises a decorative pattern on the surface of the sheet.

25
15 15. The lighting apparatus of claim 1, wherein the transmissive body is in the form of a thin sheet, and the at least one region of luminescent material includes at least one of: letters of the alphabet and numbers.

30
35 16. The lighting apparatus of claim 1, wherein the transmissive body comprises at least one of a polymer, a silicone, and glass material.

40
20 17. The lighting apparatus of claim 1, wherein the transmissive body comprises a flexible material.

45 18. The lighting apparatus of claim 1, wherein the light source comprises a light emitting diode.

5

19. The lighting apparatus of claim 18, wherein the light emitting diode emits blue light.

10

20. The lighting apparatus of claim 18, wherein the light emitting diode emits ultraviolet radiation.

15

21. The lighting apparatus of claim 1, wherein the light source comprises a laser diode.

20

10

22. The lighting apparatus of claim 1, wherein the at least one region of luminescent material includes at least one of the following phosphors: $\text{Y}_3\text{Al}_5\text{O}_{12}\text{:Ce}^{3+}$; $\text{Ba}_2\text{MgSi}_2\text{O}_7\text{:Eu}^{2+}$; $\text{Ba}_2\text{SiO}_4\text{:Eu}^{2+}$; SrS:Eu^{2+} ; $\text{SrY}_2\text{S}_4\text{:Eu}^{2+}$; $\text{CaLa}_2\text{S}_4\text{:Ce}^{3+}$; $(\text{Ca},\text{Sr})\text{S}$; and $(\text{Sr},\text{Ca},\text{Ba})(\text{Al},\text{Ga})_2\text{S}_4\text{:Eu}^{2+}$.

25

30

15

23. The lighting apparatus of claim 1, wherein the at least one region of luminescent material includes at least one of the following phosphors: $(\text{Sr},\text{Ba},\text{Ca})_5(\text{PO}_4)_3\text{Cl:Eu}^{2+}$; $\text{BaMg}_2\text{Al}_{16}\text{O}_{27}\text{:Eu}^{2+}$; $\text{BaMgAl}_{10}\text{O}_{17}\text{:Eu}^{2+}$; $\text{Ca}_8\text{Mg}(\text{SiO}_4)_4\text{Cl}_2\text{:Eu}^{2+},\text{Mn}^{2+}$; $\text{Ba}_2\text{SiO}_4\text{:Eu}^{2+}$; $\text{Ba}_2(\text{Mg},\text{Zn})\text{Si}_2\text{O}_7\text{:Eu}^{2+}$; $(\text{Ba},\text{Sr})\text{Al}_2\text{O}_4\text{:Eu}^{2+}$; and $\text{Y}_2\text{O}_3\text{:Bi}^{3+},\text{Eu}^{3+}$.

35

20

40

24. The lighting apparatus of claim 1, wherein the at least one region of luminescent material comprises a first region of luminescent material which emits a first spectrum and a second region of luminescent material which emits a second spectrum different from the first spectrum.

45

25

50

55

5

10

5

25. The lighting apparatus of claim 1, wherein the at least one region of luminescent material comprises a first region of luminescent material which emits red light and a second region of luminescent material which emits green light.

15

20

10

26. The lighting apparatus of claim 1, wherein the at least one region of luminescent material comprises phosphor blend which absorbs at least one of: blue light and UV radiation, and which emits white light.

25

27. The lighting apparatus of claim 1, wherein the light source comprises a first light emitting diode which emits a first spectrum and a second light emitting diode which emits a second spectrum different from the first spectrum.

30

15

28. The lighting apparatus of claim 27, wherein the at least one region of luminescent material comprises a first luminescent material responsive to radiation from the first light emitting diode, and a second luminescent material responsive to radiation from the second light emitting diode.

35

20

40

29. The lighting apparatus of claim 28, wherein the first luminescent material is substantially unresponsive to radiation from the second light emitting diode, and the second luminescent material is substantially unresponsive to radiation from the first light emitting diode.

45

25

15

50

55

5 30. The lighting apparatus of claim 1, further comprising a second
transmissive body optically coupled to the light source.

10 31. The lighting apparatus of claim 1, wherein at least a portion of the
5 at least one region of luminescent material is formed inside the transmissive
body.

15 32. A decorative lighting apparatus comprising:

20 a first light source;

10 a second light source;

25 a transmissive body;

 a first luminescent material formed on the transmissive body which is
activated by the first light source;

30 a second luminescent material formed on the transmissive body which
15 is activated by the second light source; and

35 a controller which activates the first and second light sources according
to a predetermined schedule.

40 33. The lighting apparatus of claim 32, wherein the first and second
20 luminescent materials produce an ornamental design.

45 34. The lighting apparatus of claim 33, wherein the first and second
luminescent materials comprises first and second phosphors.

5

35. A method of making a lighting apparatus comprising the steps of:

10

optically coupling a light source to a transmissive body;

5

forming at least one region of luminescent material on the transmissive body, the at least one region of luminescent material having an ornamental design; and

15

generating light from the light source to activate the at least one region of luminescent material.

20

10

36. The method of claim 35, wherein:

25

the light source comprises at least one LED; and

30

the at least one region of luminescent material comprises a first phosphor region emitting a first color and a second phosphor region emitting a second color.

35

40

45

50

55

FIG. 1

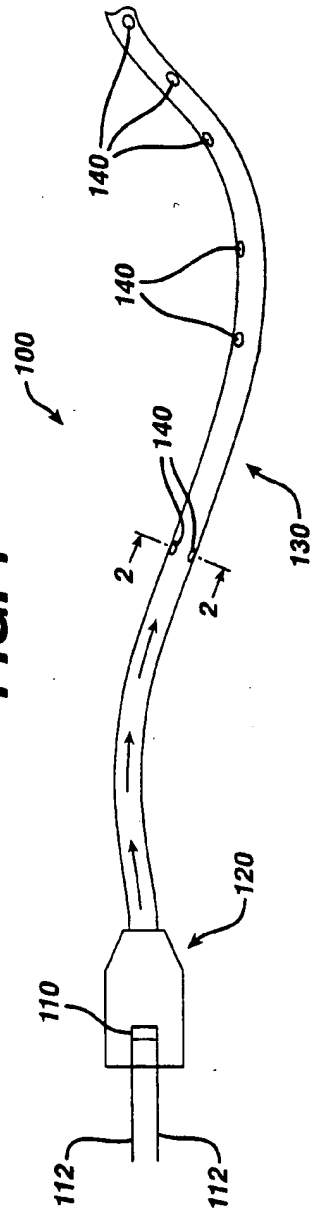


FIG. 2

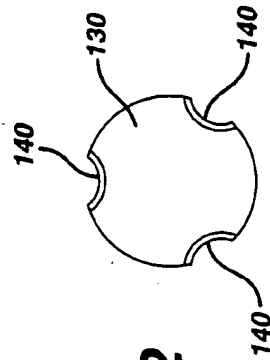


FIG. 3


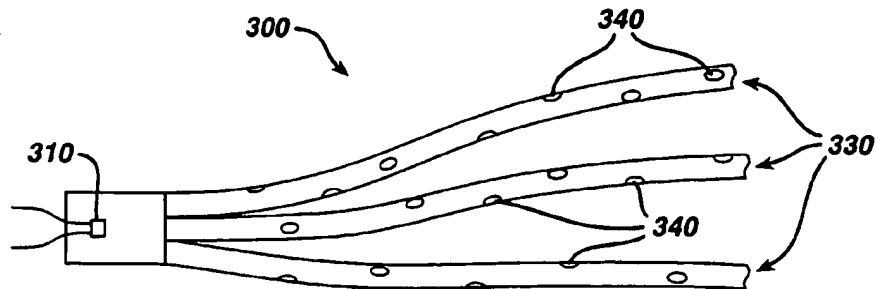


FIG. 4

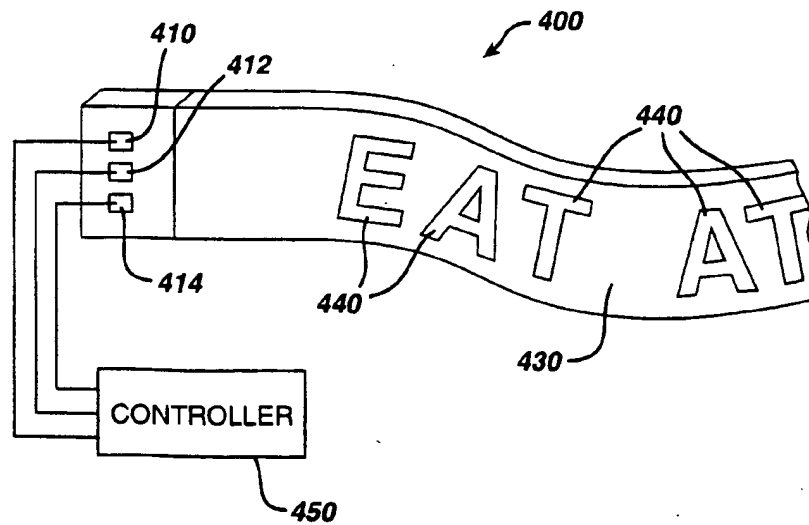

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 99/28435

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F21V8/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 F21V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 92 09909 A (J.F.BECELANI) 11 June 1992 (1992-06-11)	1,3,9, 10, 14-18, 24,25,35
Y	the whole document	1,18-21 32
A		
Y	US 5 813 753 A (L.VRIENS ET AL) 29 September 1998 (1998-09-29) cited in the application abstract; figures 1-5	18-20
Y	US 5 604 763 A (H.KATO ET AL.) 18 February 1997 (1997-02-18) cited in the application abstract; figure 1	21

-/-

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another claim or other special reason (as specified)
- "O" document relating to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "A" document member of the same patent family

Date of the actual completion of the international search

15 March 2000

Date of mailing of the international search report

23/03/2000

Name and mailing address of the ISA
European Patent Office, P.O. 5516 Petersilien 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3018

Authorized officer

Malic, K

INTERNATIONAL SEARCH REPORT

Int'l Application No
PCT/US 99/28435

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>PATENT ABSTRACTS OF JAPAN vol. 10, no. 34 (P-427) '2091', 8 February 1986 (1986-02-08) & JP 60 182402 A (MITSUBISHI JUKOGYO), 18 September 1985 (1985-09-18) abstract</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No
PCT/US 99/28435

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9209909 A	11-06-1992	FR 2669745 A AT 121545 T DE 69109130 D EP 0558600 A JP 6502929 T	29-05-1992 15-05-1995 24-05-1995 08-09-1993 31-03-1994
US 5813753 A	29-09-1998	EP 0922305 A WO 9854929 A	16-06-1999 03-12-1998
US 5604763 A	18-02-1997	JP 7297495 A JP 7297496 A DE 69503193 D DE 69503193 T EP 0688070 A	10-11-1995 10-11-1995 06-08-1998 15-04-1999 20-12-1995
JP 60182402 A	18-09-1985	NONE	